



### DOUBLE GATE REMOVABLE CENTER POST

Each gate maximum width is 12'-0"

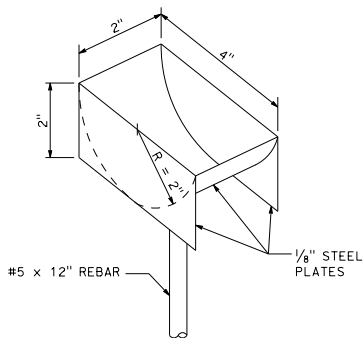


PLUNGER CUP DETAIL




GUSSET DETAIL

CENTER POST		
FENCE HEIGHT (Max)	SLATTED	D
ALL HEIGHTS	NO	1'-6"
5'-0"	YES	3'-0"
6'-0"	YES	3'-0"
8'-0"	YES	3'-6"
10'-0"	YES	4'-0"

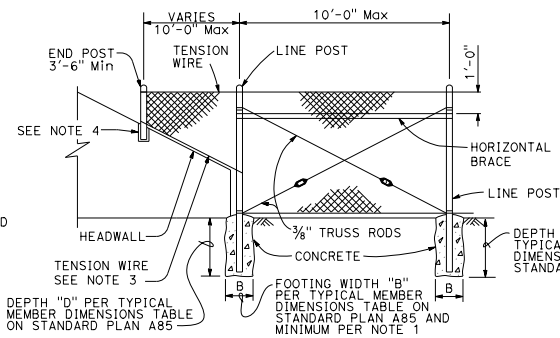


METHOD OF TYING FENCE TO HEADWALL

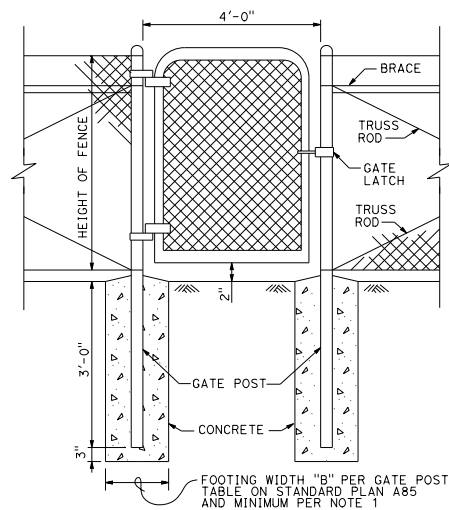


WALK GATE

### NOTES:

1. B is not less than 3 times maximum cross section of post with minimum of 8".
2. See Standard Plan A85 for Chain Link Fencing dimensions.
3. See Detail A on Standard Plan A86B for connection at headwall.
4. See Detail D on Standard Plan A86B for connection at headwall.

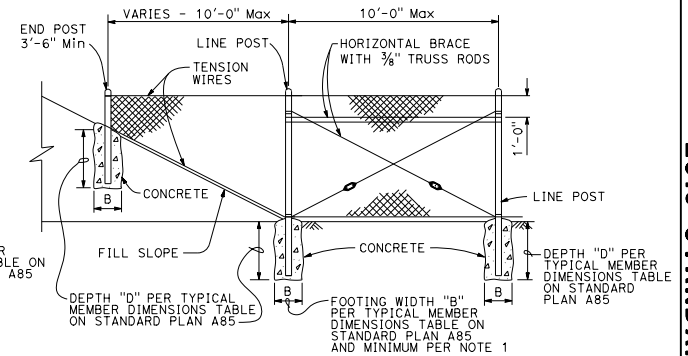

METHOD OF ERECTING FENCE FOR FILL SLOPE

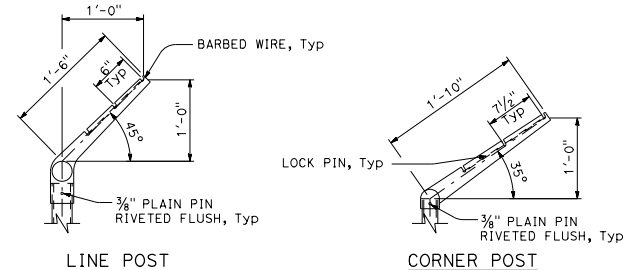

BARBED WIRE POST TOP

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**CHAIN LINK FENCE DETAILS**  
NO SCALE

**A85A**

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 31, 2018

PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
M. Reza Valizadeh  
No. C51902  
Exp. 6-30-18  
CIVIL  
STATE OF CALIFORNIA